
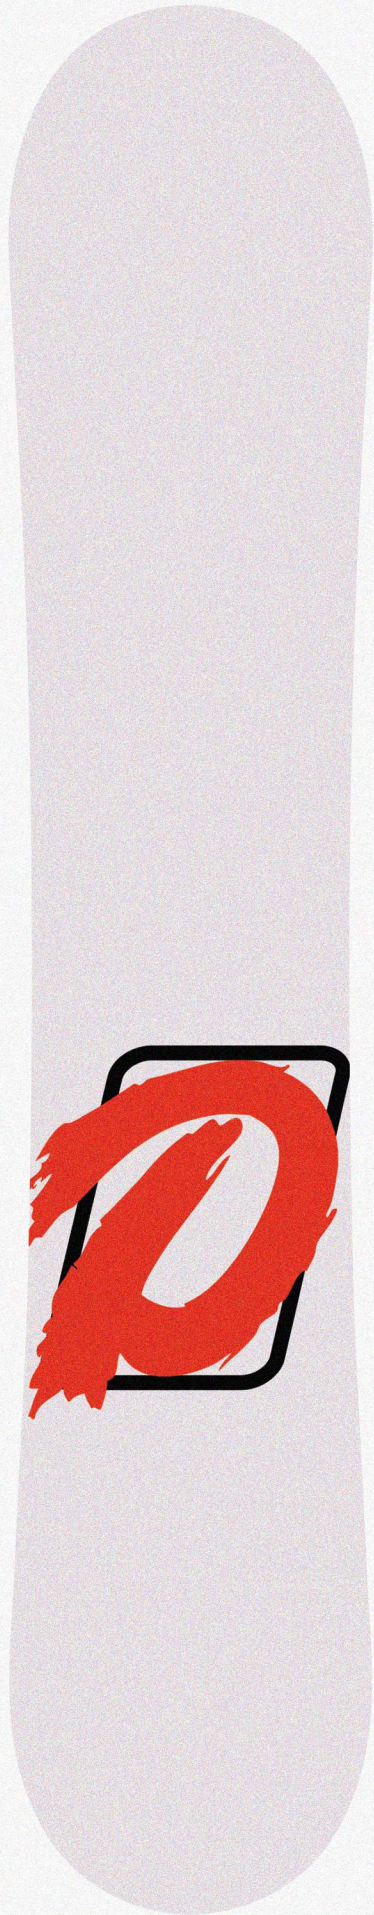


D.O.P.E. D.O.P.E. D.O.P.E.
D.O.P.E. D.O.P.E. D.O.P.E.
D.O.P.E. D.O.P.E. D.O.P.E.
D.O.P.E. D.O.P.E. D.O.P.E.
D.O.P.E. D.O.P.E. D.O.P.E.

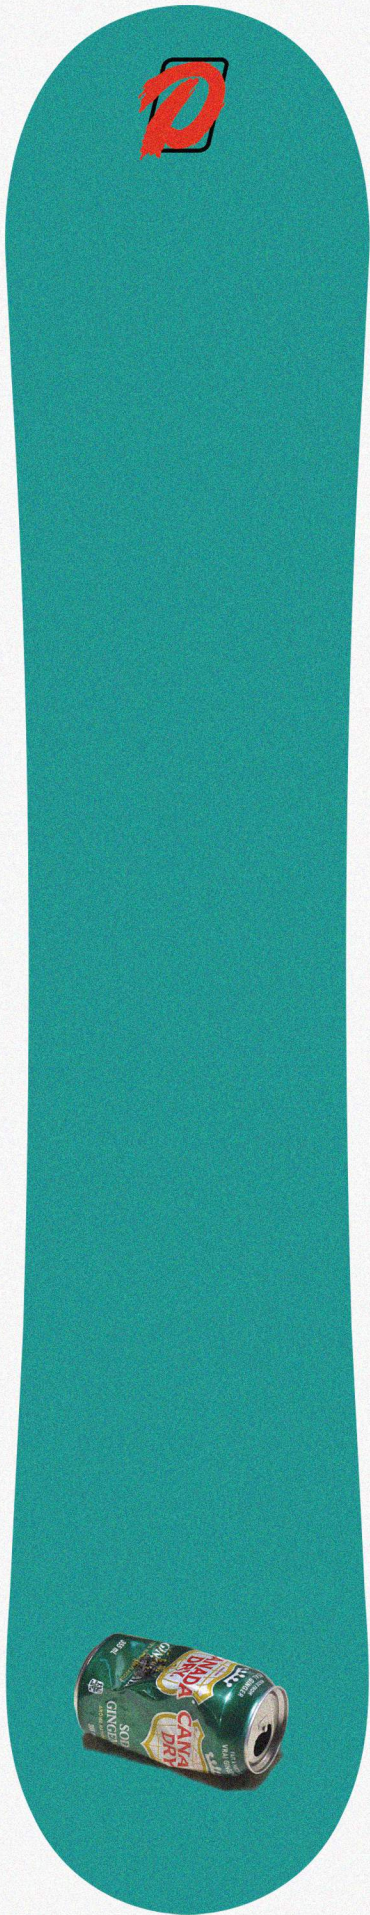

Team Board

Layne Treeter

Build

750 gram Tri-axial Fiberglass
 24 stainless steel inserts
 Ultra light poplar woodcore
 Polyurethane injected sidewalls
 Rubber Foil
 Steel Edges (single connection point)
 Sintered Base

| Size (cm) | Effective Edge (mm) | Contact Length (mm) |
|-----------|---------------------|---------------------|
|-----------|---------------------|---------------------|



| | | |
|-----|------|------|
| 153 | 1254 | 1162 |
| 155 | 1254 | 1162 |
| 158 | 1254 | 1162 |

| Waist Width (mm) | Side Cut (m) | Camber |
|------------------|--------------|--------|
|------------------|--------------|--------|

| | | |
|-----|---|-------------|
| 254 | 8 | Flat Camber |
| 254 | 8 | Flat Camber |
| 254 | 8 | Flat Camber |

| Stance Width (mm) | Setback (mm) | Flex |
|-------------------|--------------|------|
|-------------------|--------------|------|

| | | |
|-----|---|-------------|
| 565 | 0 | 6 out of 10 |
| 565 | 0 | 6 out of 10 |
| 565 | 0 | 6 out of 10 |

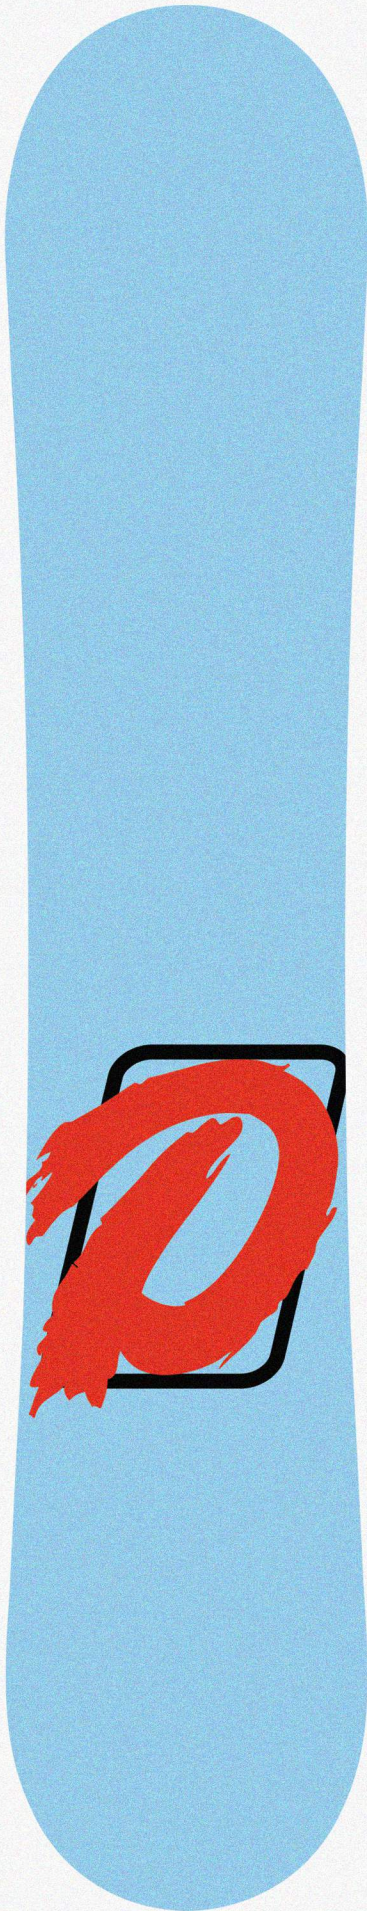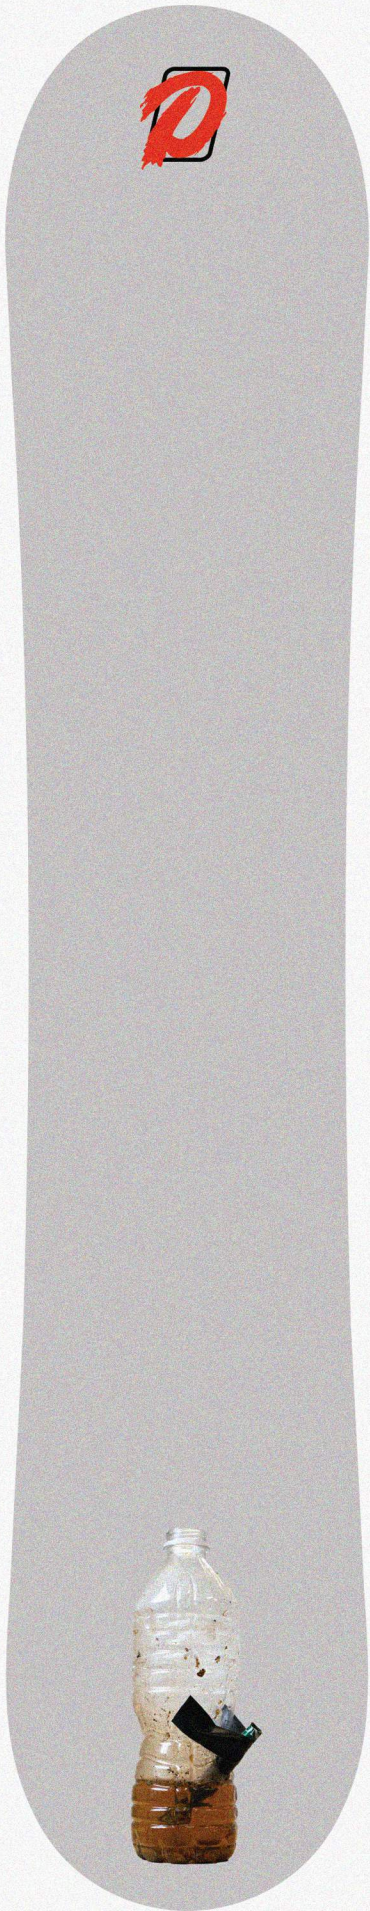

Team Board

Scot Brown

Build

750 gram Tri-axial Fiberglass
 24 stainless steel inserts
 Ultra light poplar woodcore
 Polyurethane injected sidewalls
 Rubber Foil
 Steel Edges (single connection point)
 Sintered Base

| Size (cm) | Effective Edge (mm) | Contact Length (mm) |
|-----------|---------------------|---------------------|
|-----------|---------------------|---------------------|


| | | |
|-----|------|------|
| 153 | 1157 | 1095 |
| 157 | 1186 | 1125 |

| Waist Width (mm) | Side Cut (m) | Camber |
|------------------|--------------|--------|
|------------------|--------------|--------|

| | | |
|-----|-----|--------|
| 250 | 6.8 | Hybrid |
| 251 | 7.1 | Hybrid |

| Stance Width (mm) | Setback (mm) | Flex |
|-------------------|--------------|------|
|-------------------|--------------|------|

| | | |
|-----|---|---------------|
| 580 | 0 | 6.5 out of 10 |
| 580 | 0 | 6.5 out of 10 |

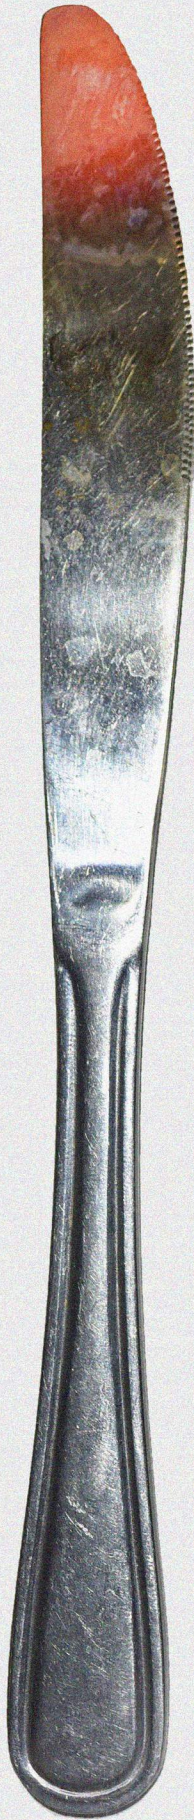

Team Board

E-man

Build

750 gram Tri-axial Fiberglass
 24 stainless steel inserts
 Ultra light poplar woodcore
 Polyurethane injected sidewalls
 Rubber Foil
 Steel Edges (single connection point)
 Sintered Base

| Size (cm) | Effective Edge (mm) | Contact Length (mm) |
|-----------|---------------------|---------------------|
|-----------|---------------------|---------------------|


| | | |
|------|------|------|
| 152 | 1160 | 1130 |
| 156 | 1190 | 1160 |
| 159W | 1225 | 1190 |
| 163W | 1260 | 1220 |

| Waist Width (mm) | Side Cut (m) | Camber |
|------------------|--------------|--------|
|------------------|--------------|--------|

| | | |
|-----|-----|--------------------|
| 241 | 7.5 | Traditional Camber |
| 251 | 7.6 | Traditional Camber |
| 261 | 8.0 | Traditional Camber |
| 265 | 8.1 | Traditional Camber |

| Stance Width (mm) | Setback (mm) | Flex |
|-------------------|--------------|------|
|-------------------|--------------|------|

| | | |
|-----|----|-------------|
| 533 | 0 | 7 out of 10 |
| 592 | 0 | 7 out of 10 |
| 559 | 10 | 7 out of 10 |
| 559 | 15 | 7 out of 10 |

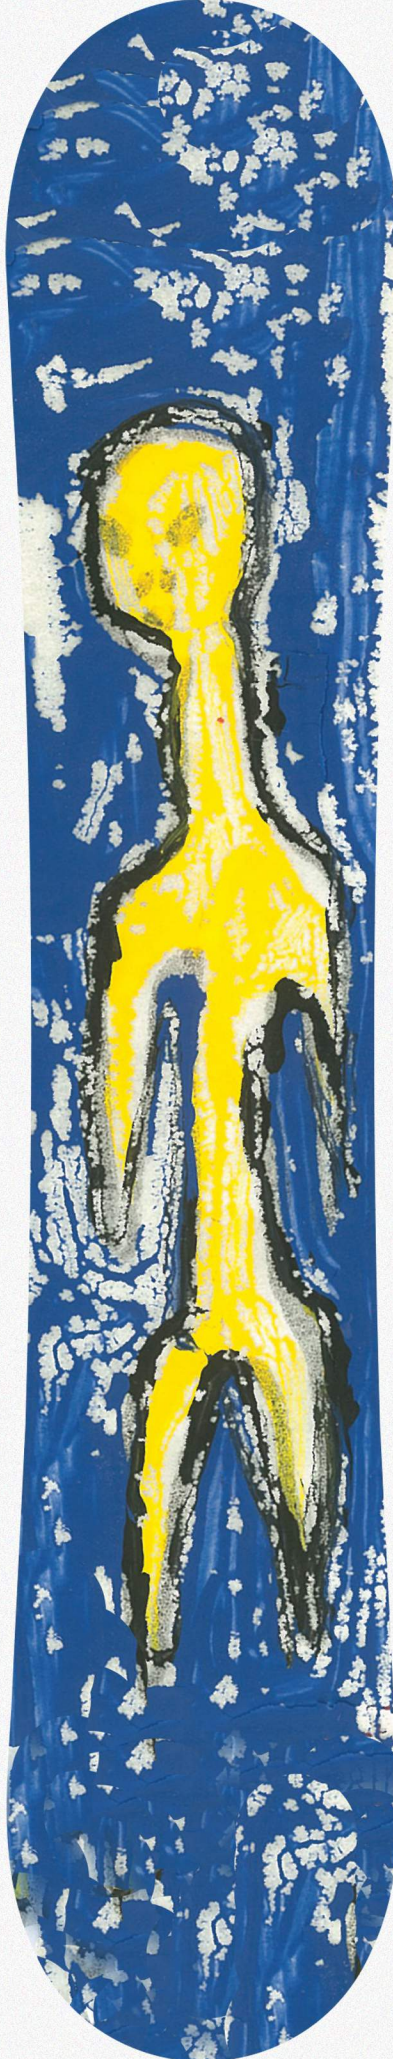

Brin Alexander Pro Model

Build

750 gram Tri-axial Fiberglass
 24 stainless steel inserts
 Ultra light poplar woodcore
 Polyurethane injected sidewalls
 Rubber Foil
 Steel Edges (single connection point)
 Sintered Base

| Size (cm) | Effective Edge (mm) | Contact Length (mm) |
|-----------|---------------------|---------------------|
|-----------|---------------------|---------------------|

| | | |
|-----|------|------|
| 153 | 1154 | 1064 |
| 157 | 1184 | 1089 |
| 161 | 1215 | 1115 |


| Waist Width (mm) | Side Cut (m) | Camber |
|------------------|--------------|--------|
|------------------|--------------|--------|

| | | |
|-----|-----|-------------|
| 252 | 7.4 | Flat Camber |
| 254 | 7.5 | Flat Camber |
| 258 | 7.6 | Flat Camber |

| Stance Width (mm) | Setback (mm) | Flex |
|-------------------|--------------|------|
|-------------------|--------------|------|

| | | |
|-----|----|-------------|
| 558 | 40 | 7 out of 10 |
| 572 | 40 | 7 out of 10 |
| 585 | 40 | 7 out of 10 |

DOPE

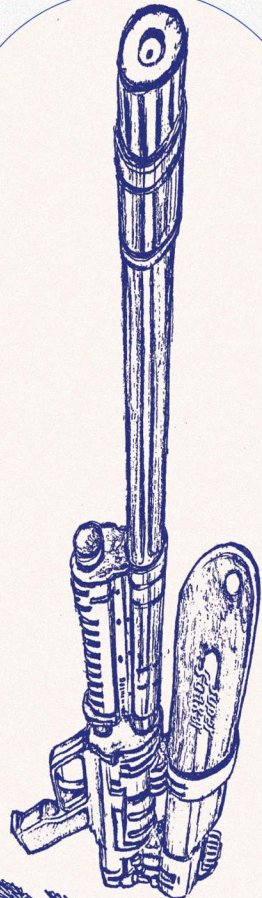

DOPE

Don Wheeler Pro Model

Build

750 gram Tri-axial Fiberglass
 24 stainless steel inserts
 Ultra light poplar woodcore
 Polyurethane injected sidewalls
 Rubber Foil
 Steel Edges (single connection point)
 Sintered Base

| Size (cm) | Effective Edge (mm) | Contact Length (mm) |
|-----------|---------------------|---------------------|
|-----------|---------------------|---------------------|

| | | |
|-----|------|------|
| 149 | 1150 | 1100 |
| 153 | 1180 | 1130 |
| 157 | 1220 | 1170 |

| Waist Width (mm) | Side Cut (m) | Camber |
|------------------|--------------|--------|
|------------------|--------------|--------|

| | | |
|-----|-----|--------------------|
| 251 | 7.7 | Traditional Camber |
| 254 | 7.8 | Traditional Camber |
| 255 | 8.1 | Traditional Camber |

| Stance Width (mm) | Setback (mm) | Flex |
|-------------------|--------------|------|
|-------------------|--------------|------|

| | | |
|-----|---|-------------|
| 572 | 0 | 6 out of 10 |
| 565 | 0 | 6 out of 10 |
| 565 | 0 | 6 out of 10 |



Gucci Ghost

Kale Pro Model



Build

750 gram Tri-axial Fiberglass
 24 stainless steel inserts
 Ultra light poplar woodcore
 Polyurethane injected sidewalls
 Rubber Foil
 Steel Edges (single connection point)
 Sintered Base

| Size (cm) | Effective Edge (mm) | Contact Length (mm) |
|-----------|---------------------|---------------------|
| 157 | 1193 | 1140 |
| 162 | 1239 | 1190 |

| Waist Width (mm) | Side Cut (m) | Camber |
|------------------|--------------|--------------------|
| 261 | 6.9 | Traditional Camber |
| 264 | 7.3 | Traditional Camber |

| Stance Width (mm) | Setback (mm) | Flex |
|-------------------|--------------|-------------|
| 560 | 45 | 8 out of 10 |
| 570 | 45 | 8 out of 10 |

| Size (cm) | Effective Edge (mm) | Contact Length (mm) |
|-----------|---------------------|---------------------|
| 153 | 1157 | 1095 |
| 157 | 1186 | 1125 |

| Waist Width (mm) | Side Cut (m) | Camber |
|------------------|--------------|--------|
| 250 | 6.8 | Hybrid |
| 251 | 7.1 | Hybrid |

| Stance Width (mm) | Setback (mm) | Flex |
|-------------------|--------------|-------------|
| 580 | 0 | 8 out of 10 |
| 580 | 0 | 8 out of 10 |

| Stance Width (mm) | Setback (mm) | Flex |
|-------------------|--------------|-------------|
| 580 | 0 | 8 out of 10 |
| 580 | 0 | 8 out of 10 |