

**D.O.P.E.**

**24/25**

# BOARDS




# LAYNE TREETER PRO MODEL

## BUILD

750 GRAM TRI-AXIAL FIBERGLASS  
 24 STAINLESS STEEL INSERTS  
 ULTRA LIGHT POPLAR WOODCORE  
 POLYURETHANE INJECTED SIDEWALLS  
 RUBBER FOIL  
 STEEL EDGES (SINGLE CONNECTION POINT)  
 SINTERED BASE

SIZE (CM)	153	155	158
EFFECTIVE EDGE (MM)	1230	1254	1236
CONTACT LENGTH (MM)	1143	1162	1185
WAIST WIDTH (MM)	253	254	256
SIDECUT (M)	7.8	8	8.1
CAMBER	FLAT	FLAT	FLAT
STANCE WIDTH (MM)	565	565	565
SETBACK (MM)	0	0	0
FLEX	6/10	6/10	6/10



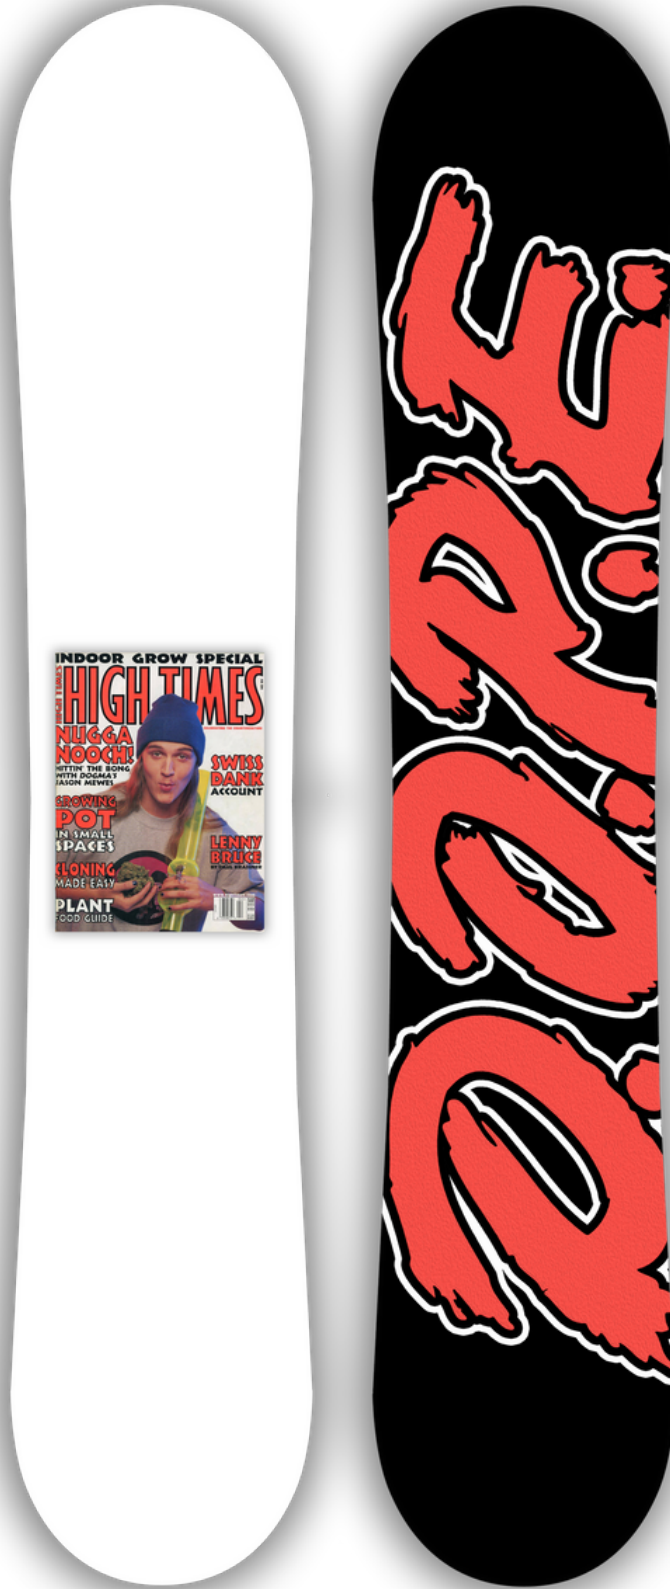

# E-MAN ANDERSON SIGNATURE

## BUILD

750 GRAM TRI-AXIAL FIBERGLASS  
 24 STAINLESS STEEL INSERTS  
 ULTRA LIGHT POPLAR WOODCORE  
 POLYURETHANE INJECTED SIDEWALLS  
 RUBBER FOIL  
 STEEL EDGES (SINGLE CONNECTION POINT)  
 SINTERED BASE

SIZE (CM)	152	156	159W	163W
EFFECTIVE EDGE (MM)	1160	1190	1225	1260
CONTACT LENGTH (MM)	1130	1160	1190	1220
WAIST WIDTH (MM)	241	251	261	265
SIDECUT (M)	7.5	7.6	8.0	8.1
CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER
STANCE WIDTH (MM)	533	592	559	559
SETBACK (MM)	0	0	10	15
FLEX	7/10	7/10	7/10	7/10



# ALEX STATHIS SIGNATURE

## BUILD

750 GRAM TRI-AXIAL FIBERGLASS  
 24 STAINLESS STEEL INSERTS  
 ULTRA LIGHT POPLAR WOODCORE  
 POLYURETHANE INJECTED SIDEWALLS  
 RUBBER FOIL  
 STEEL EDGES (SINGLE CONNECTION POINT)  
 SINTERED BASE

SIZE (CM)	159W	163W
EFFECTIVE EDGE (MM)	1260	1260
CONTACT LENGTH (MM)	1220	1220
WAIST WIDTH (MM)	265	265
SIDECUT (M)	8.1	8.1
CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER
STANCE WIDTH (MM)	559	559
SETBACK (MM)	10	15
FLEX	8/10	8/10





# BRIN ALEXANDER PRO MODEL

## BUILD

750 GRAM TRI-AXIAL FIBERGLASS  
 24 STAINLESS STEEL INSERTS  
 ULTRA LIGHT POPLAR WOODCORE  
 POLYURETHANE INJECTED SIDEWALLS  
 RUBBER FOIL  
 STEEL EDGES (SINGLE CONNECTION POINT)  
 SINTERED BASE

SIZE (CM)	153	157	161
EFFECTIVE EDGE (MM)	1154	1184	1215
CONTACT LENGTH (MM)	1064	1089	1115
WAIST WIDTH (MM)	252	254	258
SIDECUT (M)	7.4	7.5	7.6
CAMBER	FLAT	FLAT	FLAT
STANCE WIDTH (MM)	558	575	585
SETBACK (MM)	40	40	40
FLEX	7/10	7/10	7/10



# DON WHEELER PRO MODEL

## BUILD

750 GRAM TRI-AXIAL FIBERGLASS  
 24 STAINLESS STEEL INSERTS  
 ULTRA LIGHT POPLAR WOODCORE  
 POLYURETHANE INJECTED SIDEWALLS  
 RUBBER FOIL  
 STEEL EDGES (SINGLE CONNECTION POINT)  
 SINTERED BASE

SIZE (CM)	149	153	157
EFFECTIVE EDGE (MM)	1150	1180	1220
CONTACT LENGTH (MM)	1100	1130	1170
WAIST WIDTH (MM)	251	254	255
SIDECUT (M)	7.7	7.8	8.1
CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER
STANCE WIDTH (MM)	572	565	565
SETBACK (MM)	0	0	0
FLEX	6/10	6/10	6/10




# PUPPET MASTER

## BUILD

750 GRAM TRI-AXIAL FIBERGLASS  
 24 STAINLESS STEEL INSERTS  
 ULTRA LIGHT POPLAR WOODCORE  
 POLYURETHANE INJECTED SIDEWALLS  
 RUBBER FOIL  
 STEEL EDGES (SINGLE CONNECTION POINT)  
 SINTERED BASE

<b>SIZE (CM)</b>	<b>153</b>	<b>157</b>
<b>EFFECTIVE EDGE (MM)</b>	1157	1186
<b>CONTACT LENGTH (MM)</b>	1095	1125
<b>WAIST WIDTH (MM)</b>	250	251
<b>SIDECUT (M)</b>	6.8	7.1
<b>CAMBER</b>	HYBRID	HYBRID
<b>STANCE WIDTH (MM)</b>	580	580
<b>SETBACK (MM)</b>	0	0
<b>FLEX</b>	6.5/10	6.5/10



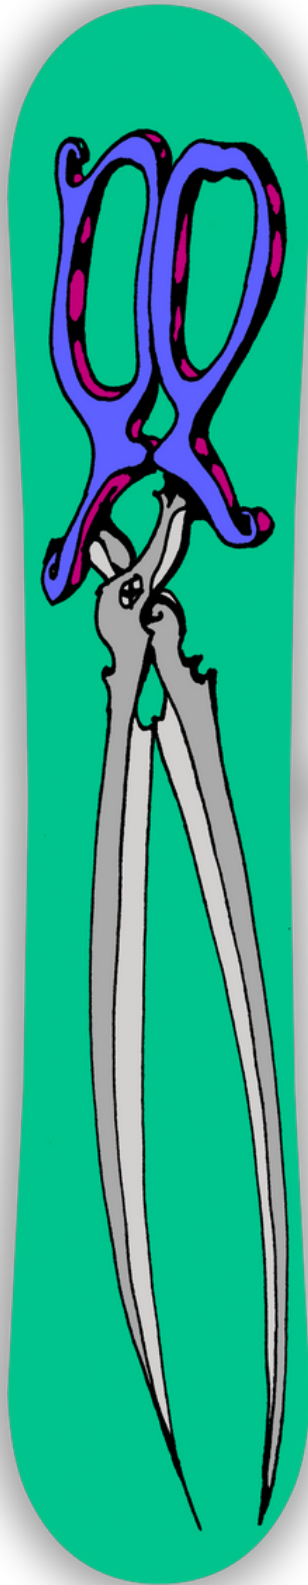

# SCISSOR BOARD

## BUILD

750 GRAM TRI-AXIAL FIBERGLASS  
 24 STAINLESS STEEL INSERTS  
 ULTRA LIGHT POPLAR WOODCORE  
 POLYURETHANE INJECTED SIDEWALLS  
 RUBBER FOIL  
 STEEL EDGES (SINGLE CONNECTION POINT)  
 SINTERED BASE  
 CARBON STRINGERS (X SHAPE)

<b>SIZE (CM)</b>	<b>156</b>	<b>160</b>
<b>EFFECTIVE EDGE (MM)</b>	1190	1220
<b>CONTACT LENGTH (MM)</b>	1160	1160
<b>WAIST WIDTH (MM)</b>	251	251
<b>SIDECUT (M)</b>	7.6	7.6
<b>CAMBER</b>	TRADITIONAL CAMBER	TRADITIONAL CAMBER
<b>STANCE WIDTH (MM)</b>	592	559
<b>SETBACK (MM)</b>	0	10
<b>FLEX</b>	7/10	7/10



# TOY STORY 4.20

## BUILD

750 GRAM TRI-AXIAL FIBERGLASS  
 24 STAINLESS STEEL INSERTS  
 ULTRA LIGHT POPLAR WOODCORE  
 POLYURETHANE INJECTED SIDEWALLS  
 RUBBER FOIL  
 STEEL EDGES (SINGLE CONNECTION POINT)  
 SINTERED BASE

<b>SIZE (CM)</b>	<b>157</b>	<b>162</b>
<b>EFFECTIVE EDGE (MM)</b>	1193	1239
<b>CONTACT LENGTH (MM)</b>	1140	1190
<b>WAIST WIDTH (MM)</b>	261	264
<b>SIDECUT (M)</b>	6.9	7.3
<b>CAMBER</b>	TRADITIONAL CAMBER	TRADITIONAL CAMBER
<b>STANCE WIDTH (MM)</b>	560	570
<b>SETBACK (MM)</b>	45	45
<b>FLEX</b>	8/10	8/10

