



D.O.P.E.

25/26

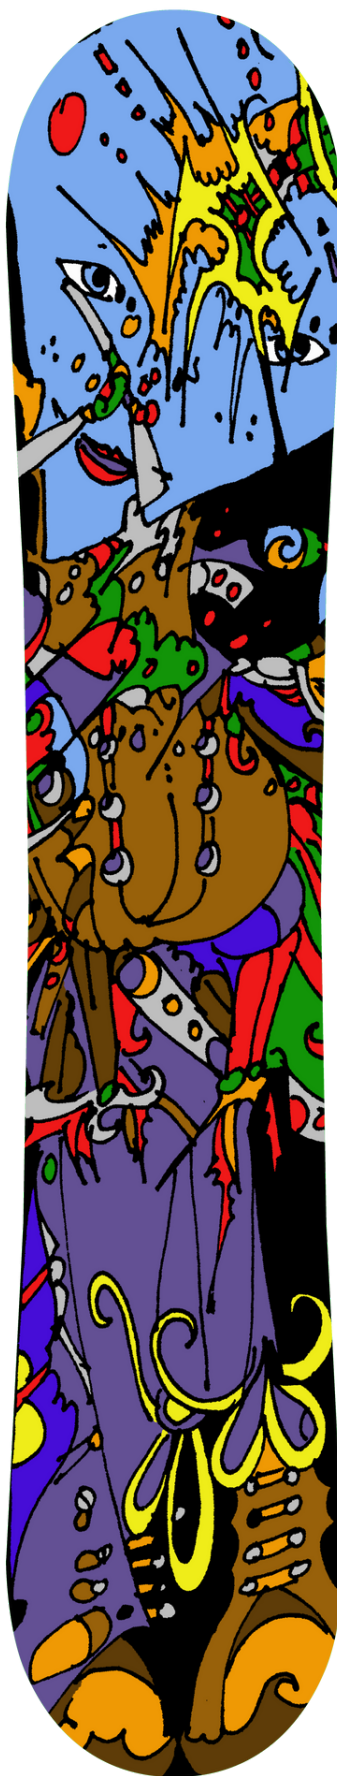

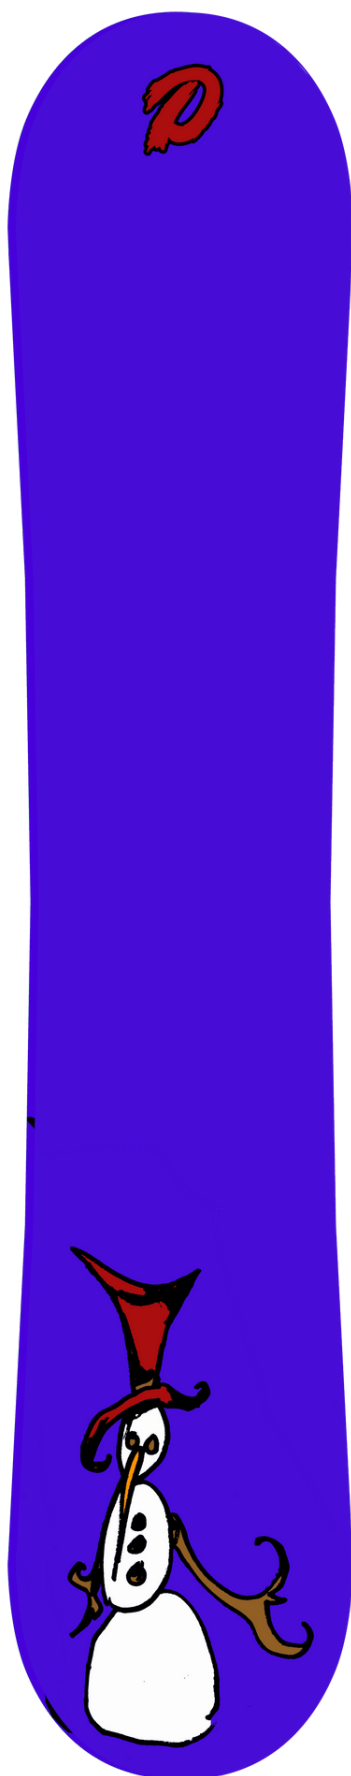

LAYNE TREETER PRO MODEL**BUILD**

750 GRAM TRI-AXIAL FIBERGLASS

24 STAINLESS STEEL INSERTS

ULTRA LIGHT POPLAR WOODCORE


POLYURETHANE INJECTED SIDEWALLS

RUBBER FOIL

STEEL EDGES (SINGLE CONNECTION POINT)

SINTERED BASE

SIZE (CM)	153	155	158
EFFECTIVE EDGE (MM)	1230	1254	1236
CONTACT LENGTH (MM)	1143	1162	1185
WAIST WIDTH (MM)	253	254	256
SIDECUT (M)	7.8	8	8.1
CAMBER	FLAT	FLAT	FLAT
STANCE WIDTH (MM)	565	565	565
SETBACK (MM)	0	0	0
FLEX	6/10	6/10	6/10

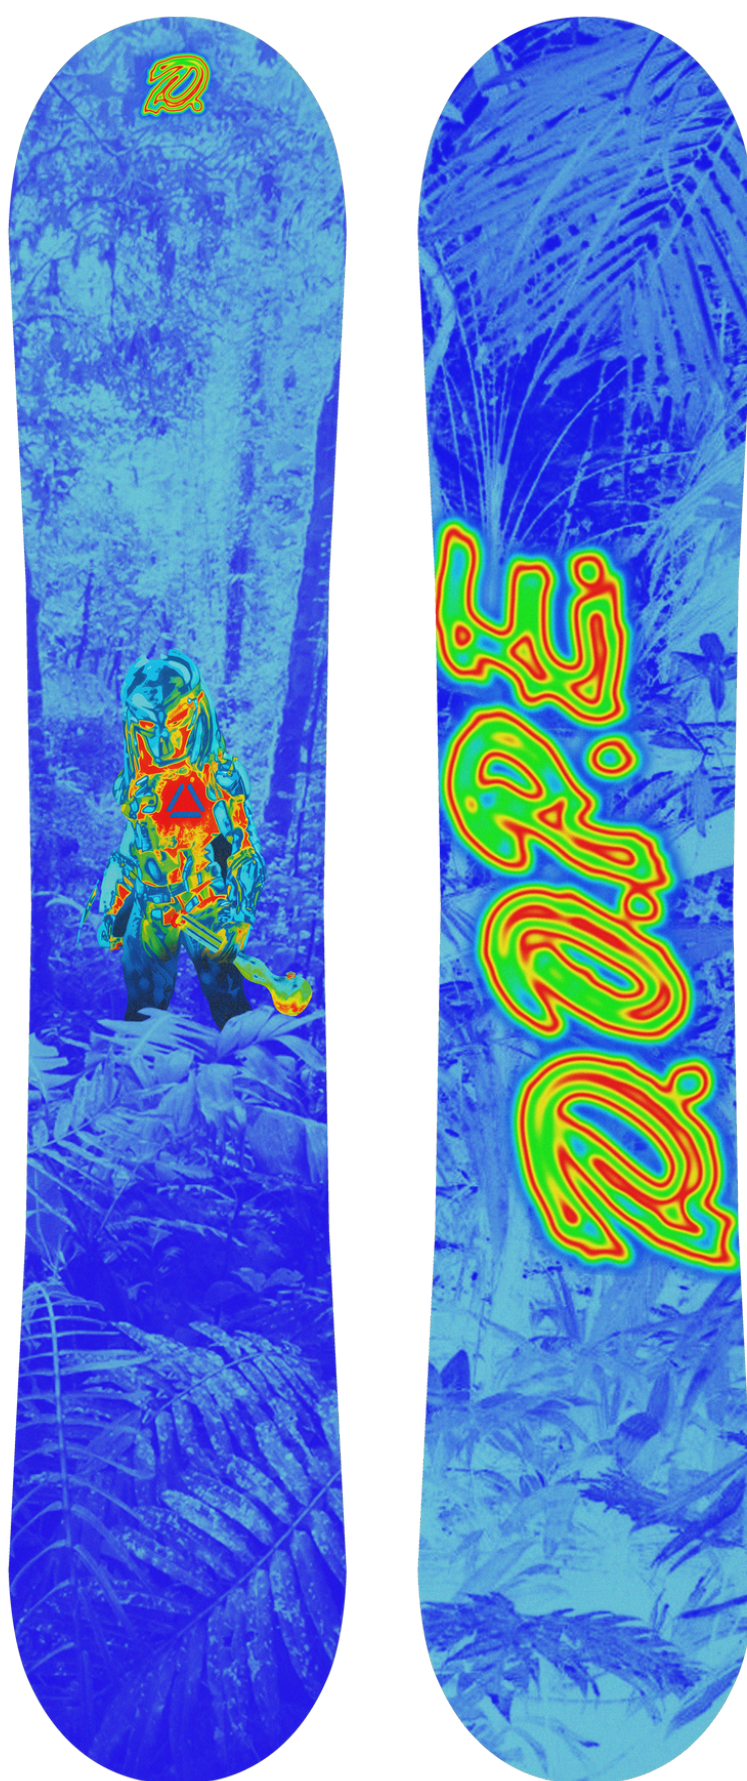

E-MAN ANDERSON SIGNATURE**BUILD**

750 GRAM TRI-AXIAL FIBERGLASS

24 STAINLESS STEEL INSERTS

ULTRA LIGHT POPLAR WOODCORE


POLYURETHANE INJECTED SIDEWALLS

RUBBER FOIL

STEEL EDGES (SINGLE CONNECTION POINT)

SINTERED BASE

SIZE (CM)	152	156	159W	163W
EFFECTIVE EDGE (MM)	1160	1190	1225	1260
CONTACT LENGTH (MM)	1130	1160	1190	1220
WAIST WIDTH (MM)	241	251	261	265
SIDECUT (M)	7.5	7.6	8.0	8.1
CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER
STANCE WIDTH (MM)	533	592	559	559
SETBACK (MM)	0	0	10	15
FLEX	7/10	7/10	7/10	7/10

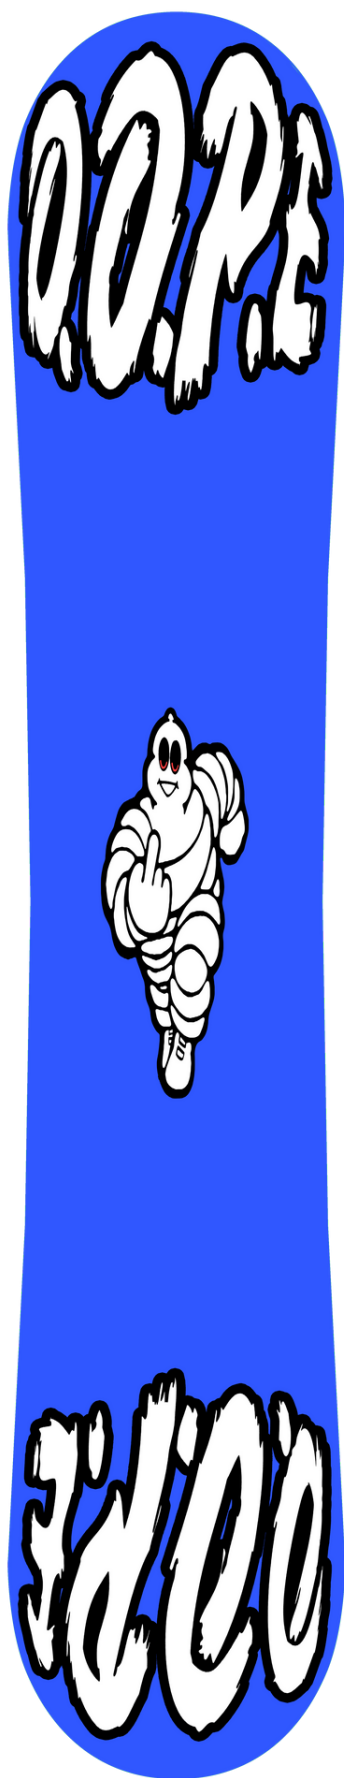

ALEX STATHIS SIGNATURE**BUILD**

750 GRAM TRI-AXIAL FIBERGLASS

24 STAINLESS STEEL INSERTS

ULTRA LIGHT POPLAR WOODCORE

POLYURETHANE INJECTED SIDEWALLS

RUBBER FOIL

STEEL EDGES (SINGLE CONNECTION POINT)

SINTERED BASE

SIZE (CM)	159W	163W
EFFECTIVE EDGE (MM)	1260	1260
CONTACT LENGTH (MM)	1220	1220
WAIST WIDTH (MM)	265	265
SIDECUT (M)	8.1	8.1
CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER
STANCE WIDTH (MM)	559	559
SETBACK (MM)	10	15
FLEX	8/10	8/10



BRIN ALEXANDER PRO MODEL**BUILD**

750 GRAM TRI-AXIAL FIBERGLASS

24 STAINLESS STEEL INSERTS

ULTRA LIGHT POPLAR WOODCORE

POLYURETHANE INJECTED SIDEWALLS

RUBBER FOIL

STEEL EDGES (SINGLE CONNECTION POINT)

SINTERED BASE

SIZE (CM)	154	158	162
EFFECTIVE EDGE (MM)	1144	1172	1200
CONTACT LENGTH (MM)	1104	1132	1160
WAIST WIDTH (MM)	250	251.5	254
SIDECUT (M)	8.9	7.9	8.0
CAMBER	FLAT w ROCKER TIPS	FLAT w ROCKER TIPS	FLAT w ROCKER TIPS
STANCE WIDTH (MM)	572	572	584
SETBACK (MM)	10	10	10
FLEX	7/10	7/10	7/10



DON WHEELER PRO MODEL**BUILD**

750 GRAM TRI-AXIAL FIBERGLASS

24 STAINLESS STEEL INSERTS

ULTRA LIGHT POPLAR WOODCORE

POLYURETHANE INJECTED SIDEWALLS

RUBBER FOIL

STEEL EDGES (SINGLE CONNECTION POINT)

SINTERED BASE

SIZE (CM)	149	153	157
EFFECTIVE EDGE (MM)	1150	1180	1220
CONTACT LENGTH (MM)	1100	1130	1170
WAIST WIDTH (MM)	251	254	255
SIDECUT (M)	7.7	7.8	8.1
CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER	TRADITIONAL CAMBER
STANCE WIDTH (MM)	572	565	565
SETBACK (MM)	0	0	0
FLEX	6/10	6/10	6/10

